


QuikDrop™ is supplied as a complete connection unit, consist of S.S 304 corrugated flexible hose with accessories (Nipple, Support bar, brackets)
This QuikDrop™ unit, enable easy and quick installation of the flexible hose to the ceiling tile support rails while locating the sprinkler in the desire position.

- ▶ Working pressure: 12 Bar (175 PSI)
- ▶ Max. bending degree - 180°
- ▶ Minimum bend radius-100mm

Available in lengths:
L= 700,1000,1200,1500,1800,2100mm

Parts list

No	Description	Mat'l	Q'yt
1	Tube	S.S 304	1
2	Reducer	S.S 304	1
3	Nipple	Carbon steel	1
4	Nut	Brass	1
5	Bracket-L	Mild steel	1
6	Bracket-S	Mild steel	2
7	Bolt	Steel	3
8	O-ring	NBR	1
9	Slider ring	Nylon66	1
10	Square bar	Mild steel	1

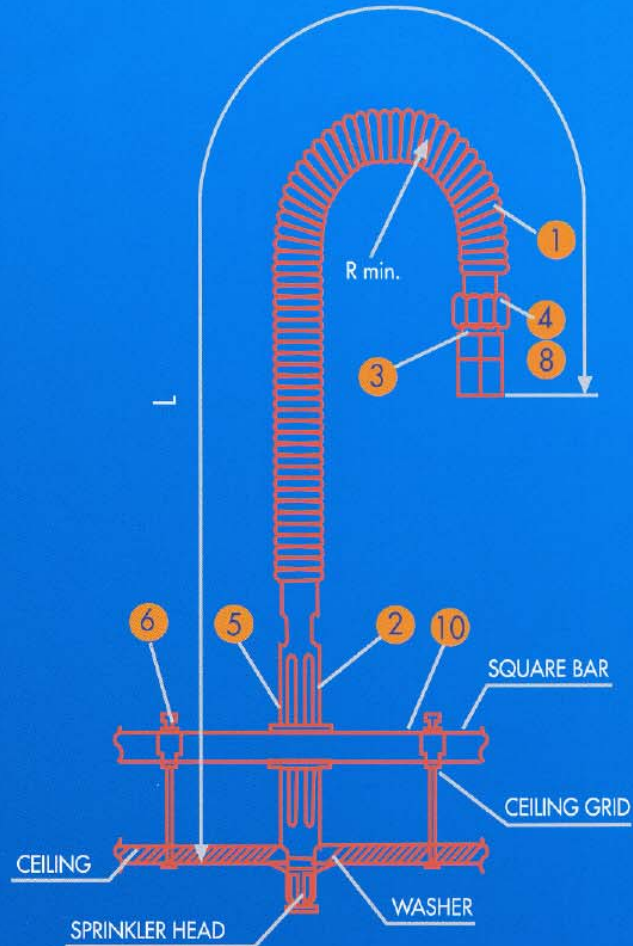

Friction Loss Data:

Equivalent 1" Schedule 40 Pipe (Loss/Metre)

Flow (l/min)	19	38	57	75.7	94.6	113.5	132.5	151.4
Length (mm)								
700 (1-90°)	2.7	3.2	3.3	3.5	3.9	5.0	6.5	9.0
1000 (1-90°)	2.9	4.0	6.4	8.8	9.5	10.1	10.3	10.7
1200 (1-90°)	3.1	5.8	6.6	8.9	9.6	12.2	15.5	18.4
1500 (1-90°)	6.2	8.0	9.5	12.1	13.1	15.6	18.0	21.4
1800 (1-90°)	7.1	8.8	10.1	12.5	13.8	16.6	18.6	24.2
2100 (1-90°)	8.5	8.0	8.9	11.4	12.5	16.2	18.1	21.9